# How to charge my Classic Aura speaker and check the battery status?

Customer Support - 2026-05-05 - Classic Aura

# You wish to charge your Classic Aura and check the battery status?

1. Classic Aura requires a USB-C charger between 5W - 30W.

30W is required for optimal charging speed and allowing for maximum volume whilst charging.

1. Connect the speaker to the USB-C charger.

The Eco (Battery) icon will blink whilst charging.







1. Once 100% charged the Eco (Battery) icon will stop blinking.

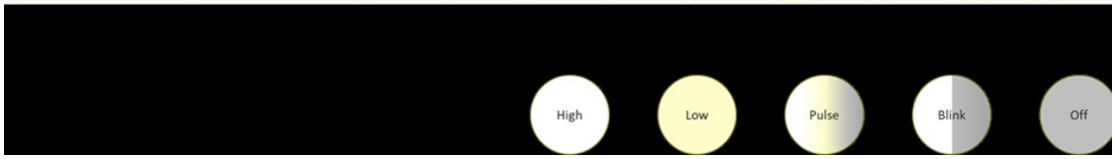
You can also check the charging state while listening by pressing the Eco button for 2sec.

The 4 LEDs above the volume dial will illuminate the current battery status.




## Battery Status Indicator – In Use

| Battery level | | LED Behavior | | | | Illustration |
|---|---|---|---|---|---|---|
| From | To | LED1 | LED2 | LED3 | LED4 | |
| 75% | 100% | high | high | high | blink |  |
| 45% | 75% | high | high | blink | off |  |
| 25% | 45% | high | blink | off | off |  |
| 5% | 25% | high | off | off | off |  |
| 0% | 5% | blink | off | off | off |  |




## Battery Status Indicator – Charging

| Battery level | | LED Behavior | | | | Illustration |
|---|---|---|---|---|---|---|
| From | To | LED1 | LED2 | LED3 | LED4 | |
| 95% | 100% | on | on | on | on |  |
| 75% | 95% | on | on | on | pulse |  |
| 45% | 75% | on | on | pulse | off |  |
| 25% | 45% | on | pulse | off | off |  |
| 0% | 25% | pulse | off | off | off |  |

